



#B6C-8120530-PR

1956 Ford Pickup Door Seal Installation

NOTE: It is necessary to use a weather stripping adhesive in order to install door seals. Dennis Carpenter Ford Reproductions recommends and sells 3M brand Weather Stripping Adhesive. Our part # is COAZ-19554-A

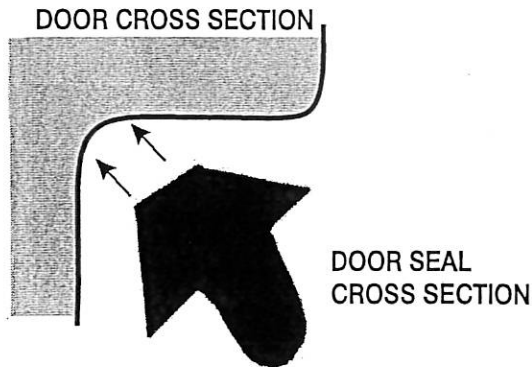

Door seal lays in the corner all the way around the door.

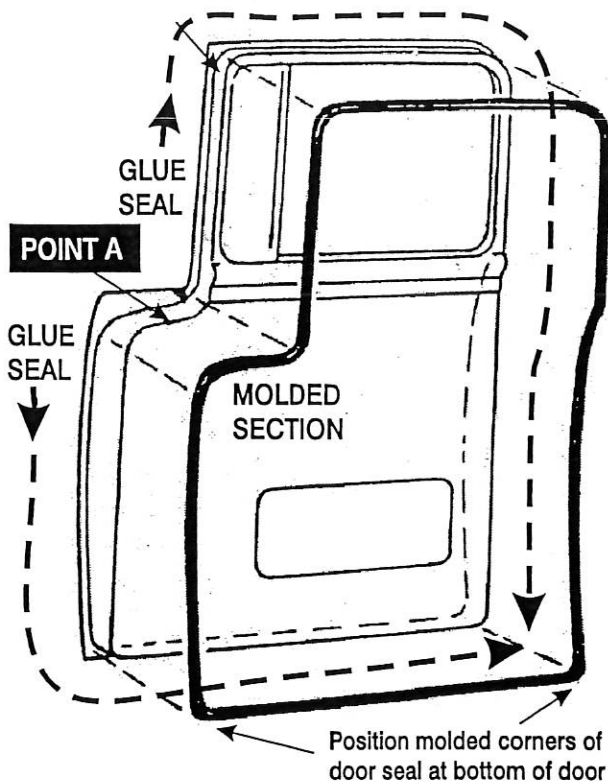

Manufacturing Quality Ford Restoration Parts

1-800-476-9653

4140 CONCORD PARKWAY SO., CONCORD, NC. 28027

www.dennis-carpenter.com

Experience has shown us that taping the door seal into position before any adhesive is applied allows you to check the fit of the seal and also aides in applying the seal.

Apply the adhesive to the door, not the seal. Glue around the door as described in the instructions below.

The best (and cleanest) results comes from glueing a section of the door at a time by removing the tape, applying the glue then reapplying the tape to hold the seal into position. After the adhesive has cured you can remove the tape.

Remember that new door seals are more resilient to compression and will cause your doors to close tightly.

HOW TO INSTALL DOOR SEALS

NOTICE: It is not necessary to remove the doors from the cab in order to replace the door seals.

STEP 1

Remove the old door seals and glue material from the doors. Clean doors thoroughly where the seals are to be adhered. A degreaser/ wax remover solution is recommended.

STEP 2

Arrange the new door seal so that the special molded section and corners are in their proper positions. (See Illustration)

STEP 3

Begin glueing the door seal at POINT A. Continue down the front of the door, along the bottom and end at the rear lower corner.

STEP 4

Again starting at POINT A glue the remainder of the seal to the door by moving up the front, across the top then down the rear edge finishing at the lower rear corner.