



#C3AZ-6351222-PR 1963-64 Galaxie Fastback Roof Rail Weatherstrip Installation

Roof rail weatherstrip seals the top of the side windows to the roof. Fits 1963-64 #63 Fastback



Dennis-Carpenter.com

704-786-8139 Email: info@dennis-carpenter.com
21 Carpenter Ct. NW, Concord, NC 28027-4627

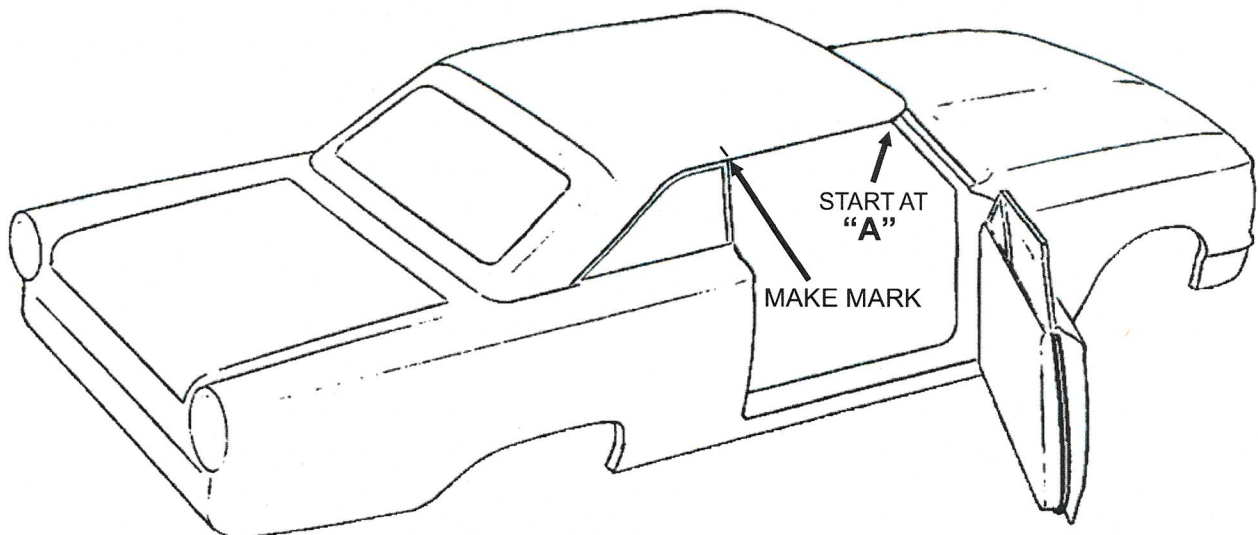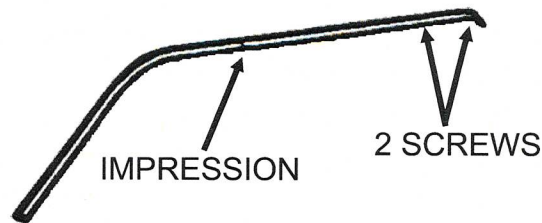

1. Before removing old weatherstrip, check to see if the door and quarter window glass are fitting well up against it. There is an impression in the rubber where the door glass and quarter window glass meet the weatherstrip. Using a piece of masking tape and a pencil, place a mark on the metal above the impression. This will be a reference mark when installing the new weatherstrip.
2. To remove old weatherstrip, start at point "A" by removing 2 screws; one in the windshield pillar and one in the roof rail about 4 inches from the front. Pull the rubber down and out of the metal retainer which is about 6 inches long and is held to the body with 2 screws.
3. Remove the short metal retainer.
4. The old weatherstrip can now be pulled down out of the groove of the retainer, starting at the front and going back toward the rear panel.
5. The new weatherstrip should be sprayed with silicone to help it slide along the metal groove that the old weatherstrip came out of.
Two persons are needed to install the new weatherstrip: Starting at the front, one person will place the weatherstrip into the grooves and push it towards the back. The second person will gently pull the weatherstrip until it reaches the quarter panel.
6. The short metal retainer can now be screwed back into place and the front part of the weatherstrip can be installed and screwed into place.