


1962-64 FAIRLANE 4-DOOR SEDAN FRONT DOOR SEAL INSTALLATION INSTRUCTIONS

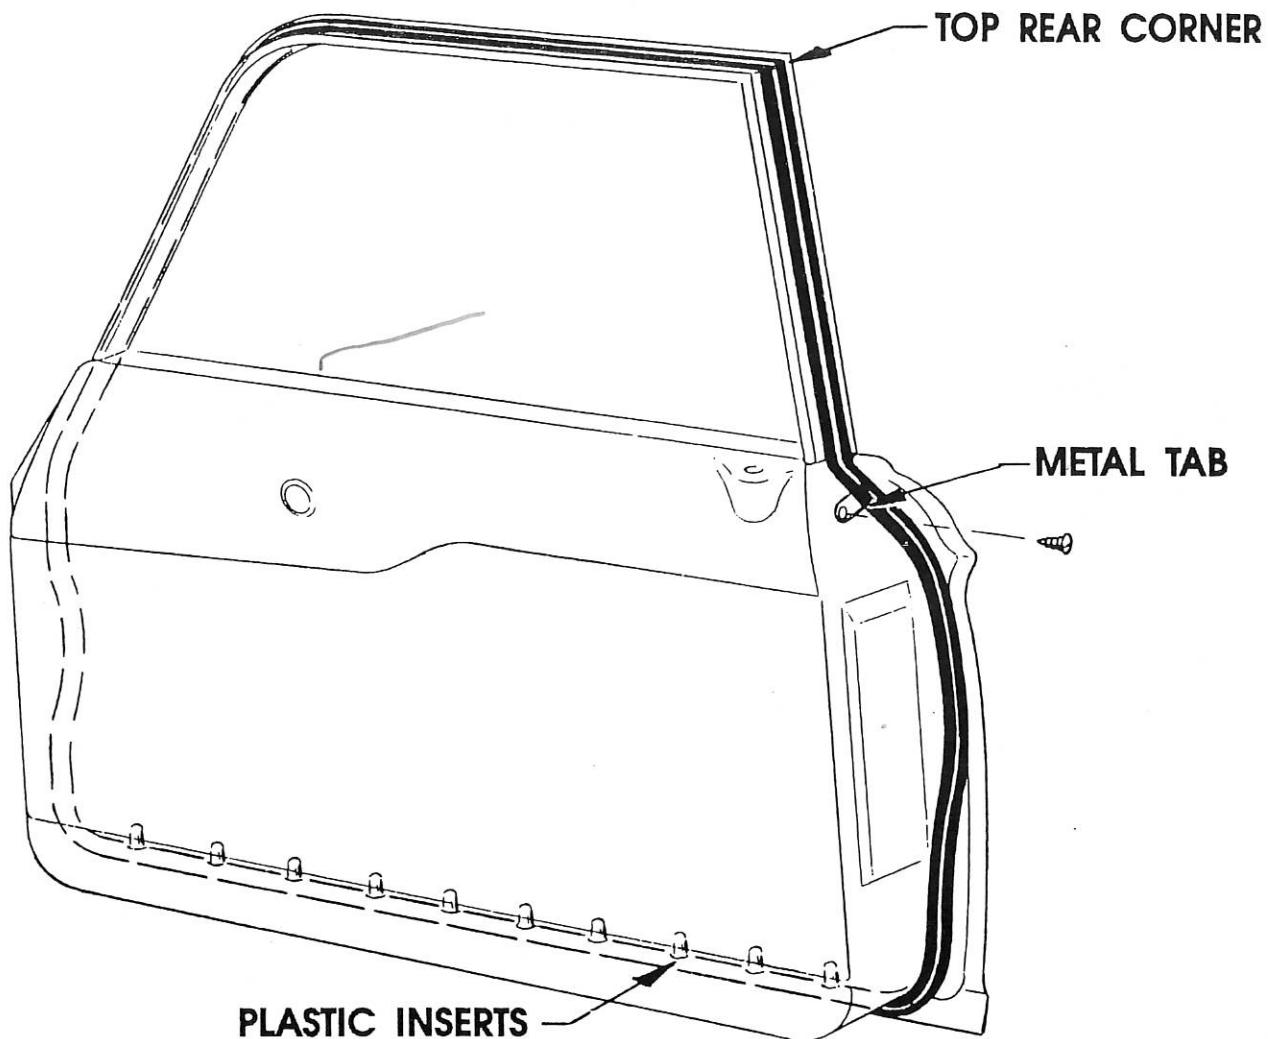

NOTE: Do not apply glue until Step #3
The Fairlane front door seal is one continuous weatherstrip.

STEP #1: Place the door seal on the door, starting at the top rear corner. The metal tab on the door seal will line up with the hole in the lock side of the door. Screw the tab to the door.


STEP #2: Continue with the door seal down the lock side to the bottom of the door. The first plastic insert will now line up with the hole in the door. Push the ten (10) plastic inserts into the door holes..

Follow the contour of the door hinge side up to the top.

STEP #3: Apply glue where required.

1962-64 FAIRLANE 4-DOOR SEDAN REAR DOOR SEAL INSTALLATION INSTRUCTIONS

Tom Carter

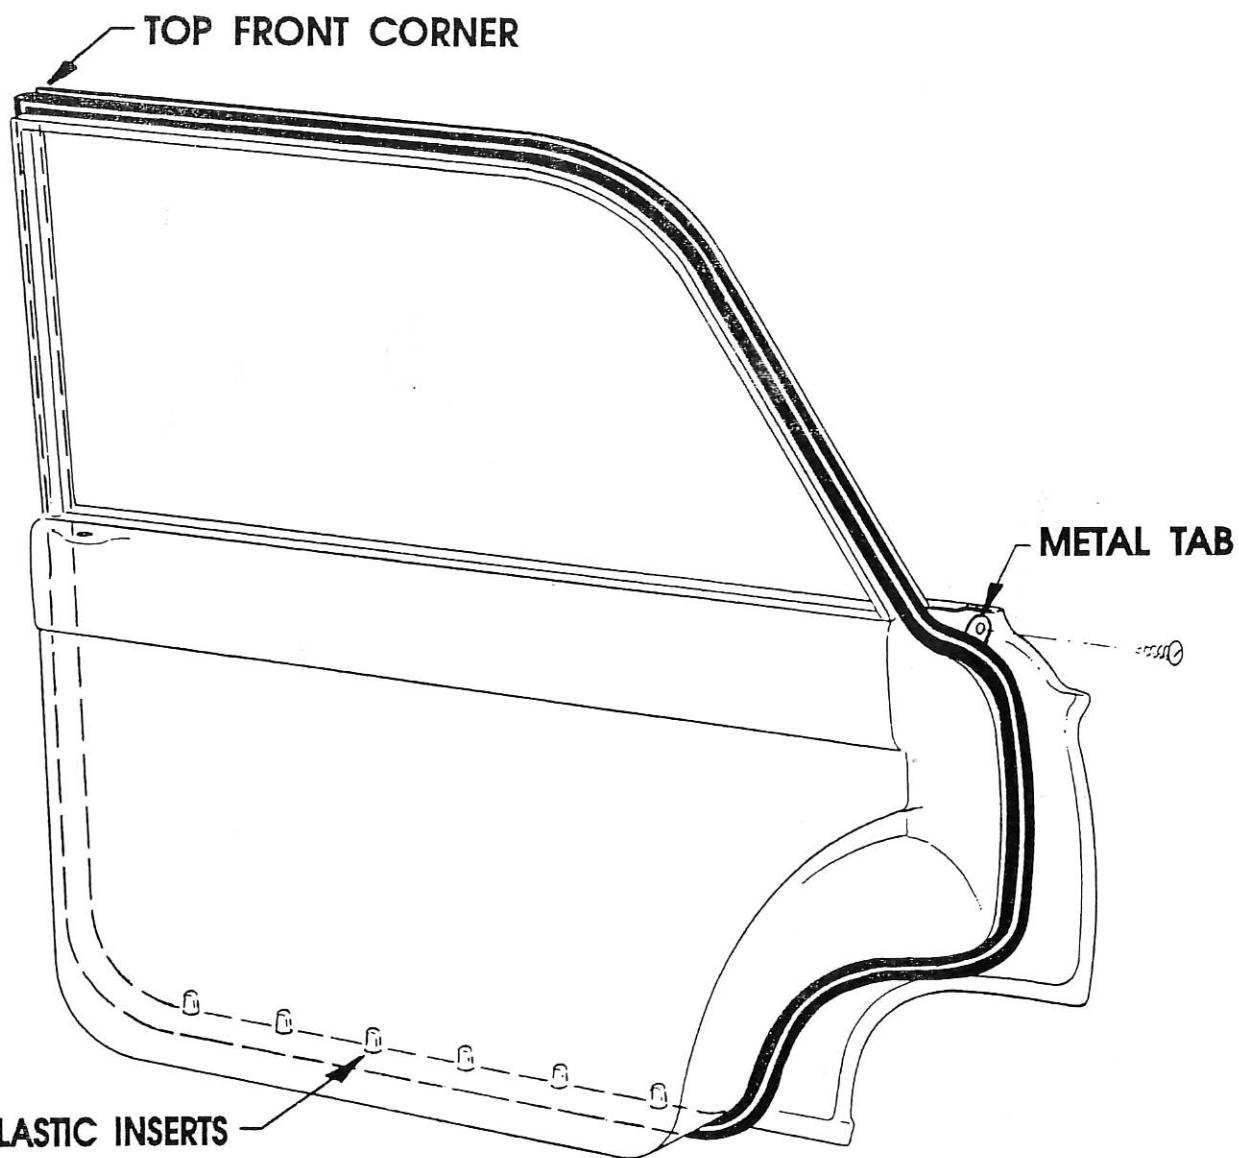

NOTE: Do not apply glue until Step #3.
The Fairlane Rear Door Seal is one continuous weatherstrip.

STEP #1: Place the door seal on the door, starting at the top front corner. The metal tab on the door seal will line up with the hole in the lock side of the door. Screw the tab to the door.

STEP #2: Continue with the door seal down the lock side to the bottom of the door. The first plastic insert will now line up with the hole in the door bottom side. Push the six (6) plastic inserts into the door holes. Follow up the hinge side to the top.

STEP #3: Apply glue where required.